COMPACT

MURR ELEKTRONIK

stay connected

Advantages at a glance

- **Economical:** Reduced inventory thanks to a wide range of configuration options for push button colors, brightness and flashing modes

- **Clear:** Laser printer compatible label sheets (sold separately) for labelling buttons

- **Practical:** Ideal for connecting to standard aluminium profiles

- **Communication:** IO-Link communication standard

- **Sealed:** IP65 rated housings

- **Secure wiring:** Quick and easy connection via an M12 port

IO-Link Control Devices

Perform simple control tasks with our compact push buttons with a built in IO-Link interface.

With the aid of Murrelektronik's IO-Link enabled command devices, simple control tasks can be performed on site. The push buttons, with an IP65 rated housing, are ideal for connecting to standard aluminium profiles. These compact IO-Link command devices have an M12 connection that allows them to be easily connected. Thanks to their IO-Link interface, they can be integrated into any interface and can be customized remotely with a wide range of functions.

Ordering Information

IO-Link 1 P-Button 42
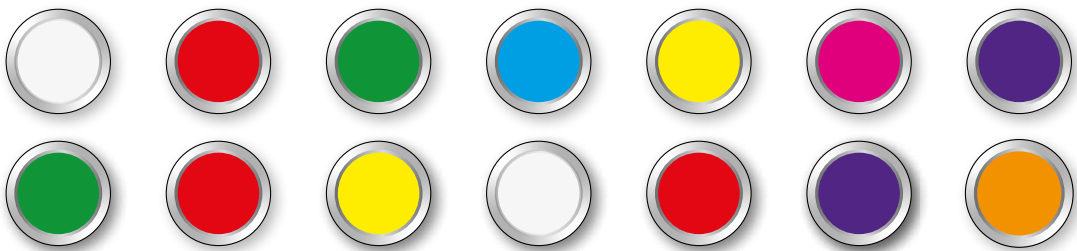1NO L M12(4)

IO-Link 2 P-Button 42
2NO L M12(4)

Approvals

CE   UKCA   c℞us   ⊘ **IO**-Link

Ordering Data		
Art.-No.	**69200**	**69202**
General data		
Button (NO)	IO-Link device with one button (1 NO contact)	IO-Link device with two buttons (2 NO contacts)
Lighting	IO-Link LED, per button RGB LED	
Operating temperature	-30 °C ... +60 °C	
Connection	Connector M12 (4-pin, A-coded)	
Mounting method	Mounting clip	
Protection	IP65	
Dimensions (H x W x D)	35.6 mm x 40 mm x 123.2 mm	
Others		
	IO-Link button with RGB LEDs, flashing and dimming function	
Accessories		
	Laser printer compatible label sheet with 54 labels (a template is available in the online shop)	**69142**

Button Configuration Options

Blink modes
Four different blink modes for different applications.

Dimming modes
With the dimming modes, the brightness of the RGB LEDs can be adjusted according to the environment.

Color Options
Choose from five standard or three individually adjustable RGB (from a color palette of 16 million colors) colors for each button.

↘ **www.murrelektronik.com**